

KIT-8304XEC-CL/4-BS32B11M | XVR KIT series

4-Channel 5MP LITE XVR with 4 x 1080P Plastic HD Cameras



Key Features

XVR Model: Z8304XEC-CL

- Up to HD 5MP Lite/1080P recording
- Universal plug-n-play for AHD/TVI/CVI/CVBS technology
- Friendly and intuitive GUI(Graphic User Interface)
- Support Cloud Service to enable remote monitoring in single click
- Support mobile phone monitoring (iOS / Android)
- Support VGA, HDMI simultaneously output



Camera Model: BS32B11M

- Crystal clear image to provide more details
- Real-time data transmission without any delay
- 500m Long distance transmission via coaxial cable
- AHD/TVI/CVI/CVBS 4-in-1 signal output
- Built-in with UTC chipset for flexible remote switch output technology



Specifications

| | |
|------------------|---|
| Model | Z8304XEC-CL |
| Compression | H.264 |
| Operating System | Embedded LINUX |
| Main Processor | Embedded Processor |
| Input Mode | 4CH HD Analog; 2CH IP + 2CH HD Analog; 8CH 1080P IP |
| Output | VGA/HDMI |
| Audio | 1 in / 1 out |
| Recording | 5MP Lite 8fps; 4MP Lite 11fps |
| Recording Type | Timing, Manual, Motion Detection External Alarm |
| Playback | 4CH |
| Search Mode | Time/ Date, Event and Channel Search |


| | |
|---------------------|--------------------------------|
| USB | USB2.0* 2 |
| Backup File Format | DAV, AVI |
| Browsers | IE/Chrome/Firefox |
| Smart Phone | Support iOS, Android |
| Hard Disk | 1 SATA |
| Network Port | 10 / 100 Mbps Ethernet (RJ-45) |
| Network Protocol | TCP/IP, DHCP, DDNS, NTP, SMTP |
| Power Supply | DC12V /2A |
| Working Temperature | 0 °C ~+55 °C |
| Working Humidity | 10% ~ 90% Humidity |
| Dimensions | 252mm*226.5mm*47.5mm |


| | |
|-----------------|---------------------|
| Model | BS32B11M |
| Image Sensor | 1/2.9" CMOS Sensor |
| Lens Type | 2.8mm fixed lens |
| Resolution | 1080P@25fps |
| Signal Out Type | AHD/TVI/CVI/CVBS |
| UTC(OSD) | Supported |
| LED Board | 12pcs SMT LED |
| IR Distance | 20M |
| Casing | Plastic mini Bullet |

| | |
|--------------------------|--------------------------------------|
| Effective Pixels | 1920*1080 |
| Minimum Illumination | 0.1Lux/F2.4 (color) 0 Lux with IR on |
| Electronic Shutter Speed | 1/50(1/60)~1/50,000sec |
| Day/Night | Auto ICR |
| Power Supply | DC12V±10% |
| Working Environment | -10 C ~ 60 C, Humidity< 90% RH |
| Power Consumption | 3.2W |
| Dimensions | 165mm*75mm*65mm |

Dimensions (mm)

1080P Analog Camera

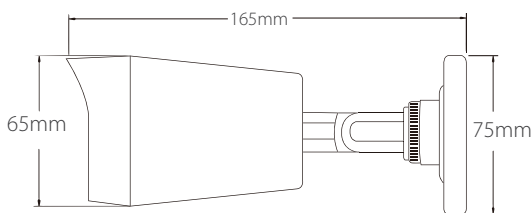

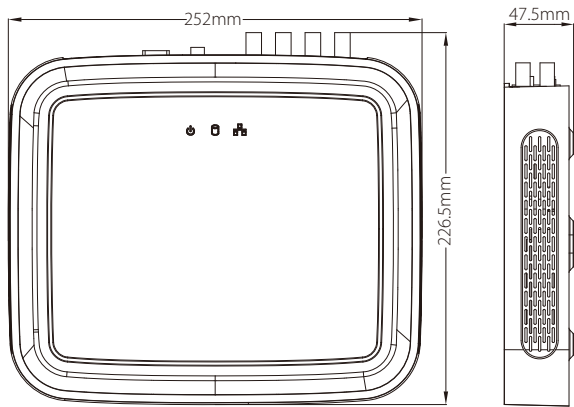

Package

| | |
|---------------------------|-------------------|
| Z8304XEC-CL * 1 | |
| Camera BS32B11M * 4 | |
| 12V/2A Power Adapter * 2 | |
| 18m BNC/Power Cable * 4 | |
| 1 split 4 Power line * 1 | |
| Mouse * 1 | |
| Package Dimensions | 345mm*168mm*298mm |
| Package Weight | 4KG |



More details